

ECOFLAPS

DESIGN & SPECIFICATIONS




MATERIAL:	INDUSTRIAL GRADE INJECTION MOLDED NYLON
CHEMICAL RESISTANCE:	NOT AFFECTED BY DIESEL FUEL, MOTOR OIL, COOLANT, SALT, ACETONE, DETERGENT, OR WINDOW CLEANER
FREEZING TEST:	-25°F FOR 30 DAYS
MOUNTING:	STANDARD MOUNTING, TRIMS EASILY
THICKNESS:	.25"
WEIGHT:	32 OZ.



2-YEAR WARRANTY

FleetAero® ECOFLAPS are now available with FleetAero® warranty. For more information, please visit Fleetaero.com/warranty

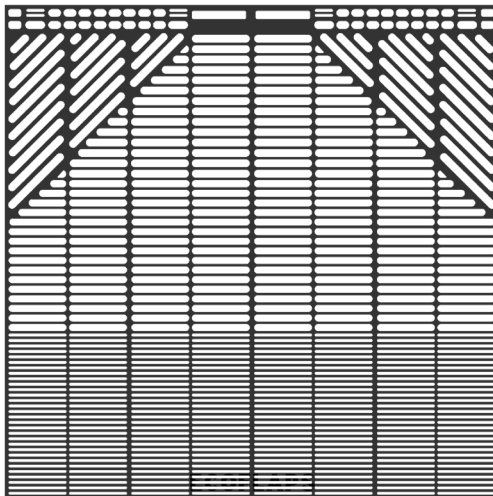

ECOFLAPS have patented wing-shaped channels designed to reduce aerodynamic drag and road spray by 70%, making them the most efficient and safe mudflap on the market.

Injection molded from an industrial grade nylon, ECOFLAPS are built to withstand extreme conditions. They are unbelievably tough and highly resistant to flap “pinch,” which means additional savings because you spend less on repairs or replacement costs.

FLEETAERO®

2465 S. 19th Ave. | Bldg. F
Phoenix, AZ 85009

For more information, quote, technical help, or parts, contact us at:
info@FleetAero.com

(844) 462-5233

fleetaero.com